



Operating Instructions

Opening / Closing

SCA – 124 Ford Transit Custom

SCA – 152 Mercedes Vito / V-Class

SCA – 186 Renault Trafic

SCA – 194 VW T5/T6

Opening the sleeping roof


Note: Please make sure to open at least one door or window so that the air can escape when opening the roof.

1. Open the Velcro® fastener of the access cover above the cabin.



2. Open the Velcro® fasteners of the tent fabric (3 fasteners).

Note: Risk of damages at the tent fabric if the fasteners are not opened!

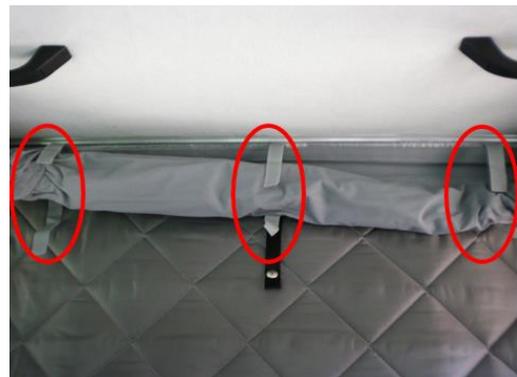


3. Open Click-Lock of the sleeping roof (driver's side as well as passenger's side)



4. Release the locking of the roof according to the following four steps:

- 1) Put the turning handle of the locking upwards.
- 2) Release the locking in counterclockwise direction.
- 3) Fold the turning handle downwards.
- 4) Finally, the locking mechanism must be fixed at the magnet (marked in red in picture 3) of the roof shell.

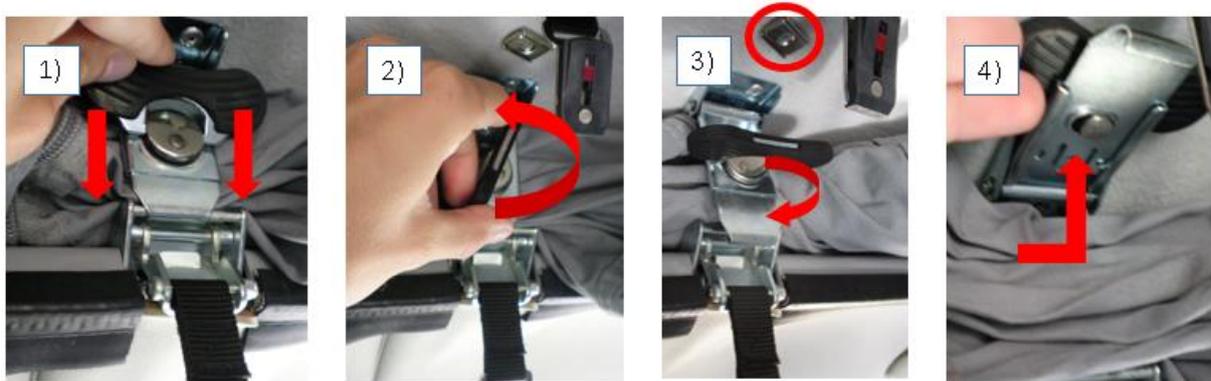

➡ These steps must always be executed at the driver's side as well as at the passenger's side.

*Note: After releasing the locking in step 2, it is **mandatory** to fold up the turning handle and subsequently secure the locking mechanism at the magnet of the roof shell in order to avoid damaging the tent fabric!*

5. Then, the sleeping roof can be erected by means of the two handles at the roof.

Note: The recumbency device must be folded up in order to provide for comfortable headroom in the vehicle.



6. If needed, the access cover can be reeled in and fixed with the marked push button.



Closing the sleeping roof

Note: Please make sure to open at least one door or window so that the air can escape when closing the roof.

1. Reel in the access cover (open the push button first).



2. Fold up the recumbency device downwards before closing the roof (picture 1).

Check once more if the locking mechanism marked in picture 2) has been fixed to the roof shell by the magnet.



3. Then, pull down the roof shell of the vehicle slowly (view onto the rear end).

Note: Make sure that the tent fabric will not be jammed in this process.




4. After that, the sleeping roof will be locked according to the following four steps:

- 1) Fold the tent fabric up thoroughly in the area of the locking mechanism.
- 2) Release the locking from the magnet and insert in the catch.
- 3) The locking is fixed by turning it in clockwise direction.
- 4) Finally, the turning handle is folded upwards.

➡ These steps must always be executed at the driver's side as well as at the passenger's side.

Note: Make sure that the tent fabric will not be jammed in this process.

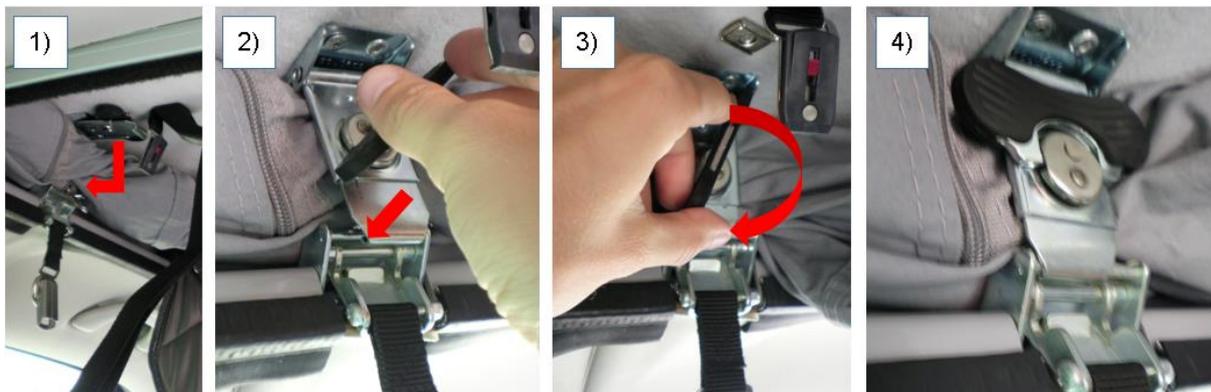

5. Close the Click-Lock of the sleeping roof (driver's site as well as passenger's side).



6. Then fold up the remaining tent fabric thoroughly in the front area and fix it using the three intended Velcro® fasteners.



7. Close the Velcro® fastener of the access cover above the cabin.

Note: Fix the access cover at the Velcro® fastener with a certain pretension.



8. Finally, parts, which are projecting laterally, can be accommodated in the cavity between sleeping roof and access cover.





C.F. Maier Europlast GmbH & Co KG

Dept. SCA
Postfach 11 60
D-89548 Königsbronn

Wiesenstraße 43
D-89551 Königsbronn

Phone. +49 7328 81-225
Fax +49 7328 81-277
Mail info-ep@c-f-maier.de

www.sca-daecher.de
www.c-f-maier.de