



## **Operation Instructions**

Opening / Closing Emergency – Release for all types of  
SCA – Sleeping roofs

**Open roof**

1. Pull locking lever to the right / push / keep it in that position
2. Push roof to the top

**Close roof****Attention!**

**In closing the roof, make sure at least one door or window are open for a better aeration!**

1. Pull roof shell slowly to the bottom and see that the pull-in device at the side does bend inwards.  
  
→ if not, open again and pull more slowly. Pull roof shell as far to the bottom until neutral position is reached, i.e. roof shell remains in place



2. Pull tent cloth inwards
3. Pull roof shell completely to the bottom, but be careful not to squeeze in the tent cloth.



4. Pull constantly to the bottom with both handles until the roof shell engages audibly **once**.



5. Pull once more strongly to the bottom with both hands at the left and right handle respectively until the roof shell engages for the **second** time.

**Only now the roof shell is firmly locked.**

6. Close the sliding board carefully, but be careful at the same time not to squeeze in the cloth below.



7. Push cloth bellow behind the sliding board.

**Sliding boards differ from model to model.**



8. Close sliding board slowly, but be careful not to squeeze in the cloth in the process.



9. Closing the sliding board completely



**Emergency – Release:**

1. Remove all four screws at the top side of the roof with an Allan key ( size 6 )



2. Open roof




3. Push the locking back and remove the lock from the gudgeon.
4. Rescrew the lock to the roof shell.
5. The roof can now be closed again as described above



6. If the lock does not run clearly across the plugs, you will have to readjust it. For doing so please unfasten both locknuts.

The lock is now moveable in horizontal and vertical direction.

After having readjusted the lock it is necessary to retighten the locknuts

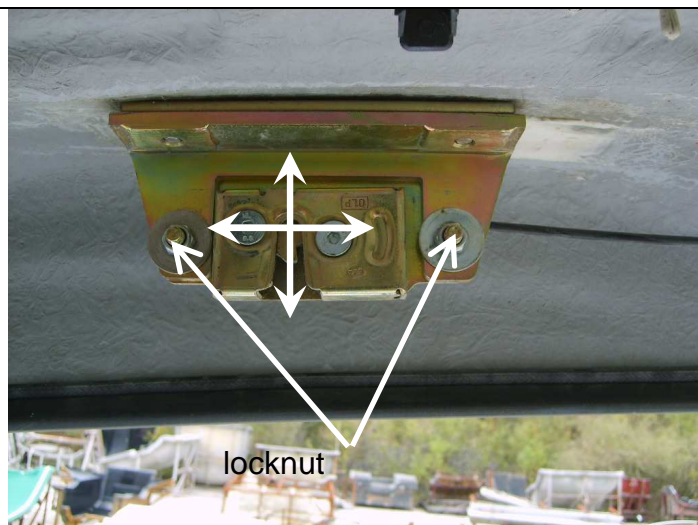

7. In case that the horizontal way of Adjusting is insufficient, it is possible to unfasten carefully both screws at the hinge shears for a horizontal readjustment

Attention : The gas pressure Spring will push the roof-shell forwards



### C.F. Maier Europlast GmbH & Co KG

Abteilung SCA  
Postfach 11 60  
89548 Königsbronn  
Wiesenstraße 43  
89551 Königsbronn

Tel. +49 7328 81-225  
Fax +49 7328 81-277  
Mail info-ep@c-f-maier.de

[www.sca-daecher.de](http://www.sca-daecher.de)  
[www.c-f-maier.de](http://www.c-f-maier.de)